



### WHO WE ARE

We are operators, innovators, engineers, and above all, a family. Garage born in Bellingham, Washington, we got out footing in this industry by building attachments that got OUR jobs done. We believed in quality and versatility from the beginning, and knew how much more gets done when machine operators are not worried about something falling apart. We enjoy pushing the boundaries, not cutting the costs and quality. Our pride comes neither from profits nor volumes, but satisfied customers who got the job done - the right way - the first time. Welcome to Eterra.

This catalog is designed to get you up to date on our latest products going into 2020. We want to make sure that you have the right tools for your upcoming projects. For all pricing quotes and general inquiries, please contact us or your local dealer and a product expert will be able to assist you.




360.203.7730



SALES@ETERRAATTACHMENTS.COM



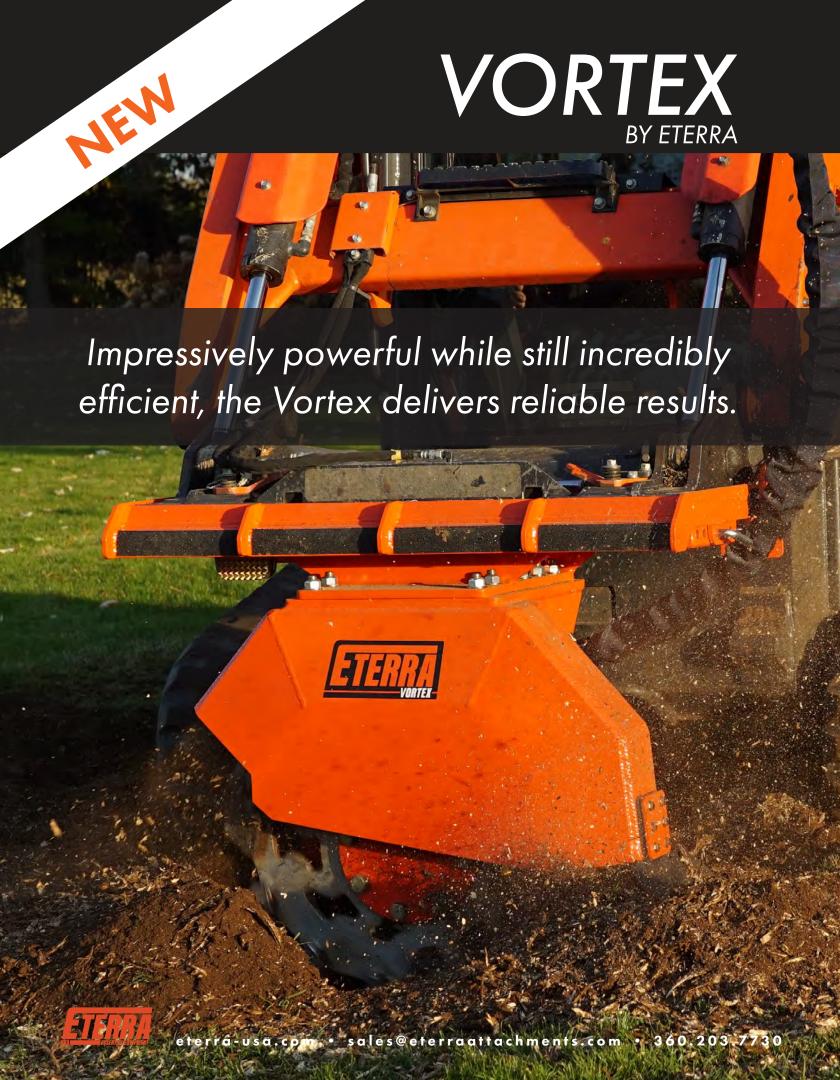





PRESENTING THE ETERRA RAPTOR FLAMETHROWER

THE WORLD'S FIRST SKID STEER MOUNTED FLAMETHROWER

This product is not available for sale. This product was designed for experimental and promotional uses only. Eterra believes in innovation and safety and does not endorse dangerous or irresponsible behavior to any degree. It is Eterra's mission to design and deliver the highest quality and most efficient equipment to its valued customers



### VORTEX BY ETERRA

Eterra's new Vortex Stump Grinder is a state-of-the-art tool with a high torque output radial piston motor, combined with a robust direct drive system and an aggressive wheel for increased power and cutting capacity. VM27 | VM31





The Vortex Stump Grinder was designed and manufactured by Eterra in the USA to increase stump grinding efficiencies... Simply put, Eterra is tired of the commonly poorly designed, underpowered, and cheap stump grinders.

The Vortex's direct drive system is overbuilt, reliable and easy to maintain. It was designed in conjunction with the radial piston motor and the aggressive heavy duty wheel with the goal to never let you down.

#### **Unmatched Power Delivery**


	VM-27	VM-31	
Weight (LBS)	1050	1075	
RPM Range	500-650	500-900	
Flow Rating (GPM)	18-30	30-45	
Drive System	Direct Drive Mega Hub System	Direct Drive Mega Hub System	
Motor	High Torque Radial Piston Motor	High Torque Radial Piston Motor	
Width	46" 46"		
Machine Compatibility	SSL Quick Attach   Compact Excavator   SSL Quick Attach   Exc		



# **RAPTOR**









Shown with Sickle Bar (ET-BMS-70) mower head.



Shown with Cyclone (ET-CY-48) mower head.

<b>SPEGS</b> (with Sidewinder Mower Head)	RAPTOR BOOM ARM	REACH	APPROXIMATE
Parked Dimensions (inches)	53" W / 68" L / 77" H	w/ 36″ Flail Head	12.5′ +
Max. Side Reach from Centerline (inches)	151	w/ 48" Rotary Head	14' +
Head Rotation	210º	w/ 5′ Sickle Head	16′ +
Max. Cut Height from Ground (inches)	120	w/ 7′ Sickle Head	18' +
Max. Cut Depth from 60° Slope	56	w/ 9′ Sickle Head	20' +
Arm Weight (LBS)	1,222		
Flow Rate (GPM)	17-25		
Max. Pressure (PSI)	3,500		

SKU: ET-RT-20

💲 REQUEST A QUOTE



Contact us for custom machine applications



# SICKLE BAR

Experience superior reach and versatility for next-level roadside clearing with a Sickle Bar cutter. 150 degrees of cutting angle adjustment, including 45 degrees below grade will make your operation more nimble. Almost everything you wanted to cut with your Skid Steer is now in reach thanks to the Raptor Boom Arm.

Serrated 2" Teeth and Blade Guards

Pitman/Gear Drive Systems 5 FT, 7 FT, 9 FT



#### MODELS

5 FT ET-BMS-50 7 FT ET-BMS-70 9 FT ET-BMS-90



REQUEST A QUOTE

MODEL	5FT	7 <i>FT</i>	9 F T
Length	60"	84"	108″
Overall Length	84"	108″	132″
Weight	225 Lbs	350 Lbs	400 Lbs
Drive System	Hydraulic Motor	Hydraulic Motor	Hydraulic Motor
Sickle Drive Systen	Pitman Arm	Gear Box	Gear Box
Cutting Capacity	Up to 2"	Up to 2"	Up to 2"
Flow Requirement	9 GPM - 22 GPM	12 GPM - 22 GPM	12 GPM - 22 GPM
Minimum Pressure	2250 PSI	2250 PSI	2250 PSI
Maximum Pressure	3500 PSI	3500 PSI	3500 PSI
Water Submersion	Yes	No	No

SKU: ET-SB-XX

21.5 FT. Reach with 9 FT. Sickle Bar (From Machine Center)




If clearing large material and removing the most vegetation with a single pass is what's required, the Cyclone is designed to do just that. Just a reminder, this is an open face cutter so use it with extreme caution.

Intelligent hose routing. Hoses and fittings are designed to reduce heat and keep you operating, not fixing hoses.

Interchange mower heads with Eterra's tube clamp system.

A wide motor selection makes it easy for you to select the best for your machine and line of work.

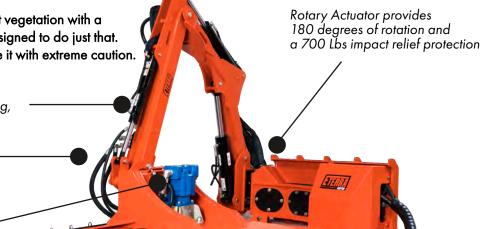

#### **THE CYCLONE 48"** ROTARY IS YOUR RAPTOR'S HEAVY MATERIAL MOWER HEAD







MODEL	<b>48</b> "	<b>60"</b> Not Raptor Compatible	
Weight	600 LBS	1,350 LBS	
Cutting Path Width	48"	60"	
Drive System	Direct Drive		
Skid Shoes	AR500 (Replaceable)		
Hydraulic Hoses	85" with 1/2" Flat Faced Couplers		
Cutting Capacity	Up To 6" Up To 10"		
Blades	2x9 LBS Forged	2x12 LBS Forged	
Blade Bar	1" Thick T1	-	
Hydr. Flow Requirement	15-40 GPM @ 3,000 PSI	25-40 GPM @ 3,000 PSI	
Cutter Shaft Rotation Speed	1,300-1,500 RPM		

SKU: ET-CY-XX





A popular addition to the Raptor, the open-face and deep cutting design of this flail mower combines to tackle the toughest roadside applications. The Sidewinder mulches blackberry bushes, tall grass and brambles with ease so you can expect a perfect finish with one pass.

Full range of motion to right side of machine

Adjustable control valve block

Roller provides an even cut and smooth operation



#### THE SIDEWINDER 36" FLAIL IS YOUR RAPTOR'S LIGHT MATERIAL, BRUSH & GRASS MOWER



Weight 392 LBS Width 50" 25.5" Depth 36" **Cutter Width** 20" Height **Cutter Blades** 20 Cutter Blade Weight 1 LBS **Cutter Retention** 3/4" Grade 8, Castle Nut Locked Self Aligning Spherical **Bearings** 

REQUEST A QUOTE SKU: ET-SW-XX

10 - 22 GPM



Flow Rate

The Cyclone is as sleek as it is stout. Gussets and the unique housing design maximize every strength desired by an excavator operator. To us, it's a powerful piece of art.

This mower "Spins Up" FAST!

Ensuring the operator doesn't get bogged down in heavy material, the Cyclone uses a 2-blade system. This proprietary blade carrier design ensures maximum tip speed and minimal energy loss from blade bar impacts on brush and trees.

12 LB Dual Edged Blades



#### Mount your Cyclone to your Excavator



48"





Use the SMB-1000 mounting plate to convert to an excavator

Use with the ET-CY-48 only

MODEL	<b>48</b> "	<i>60</i> "		
Weight	600 LBS	1,350 LBS		
Cutting Path Width	48"	60″		
Drive System	Direct Drive			
Skid Shoes	AR500 (Replaceable)	AR500 (Replaceable)		
Hydraulic Hoses	85" with 1/2" Flat Faced Couplers	85" with 1/2" Flat Faced Couplers		
Cutting Capacity	Up To 6" Up To 10"			
Blades	2x9 LBS Forged, reversible dual edges 2x12 LBS Forged, reversible dual ed			
Blade Bar	1" Thick T1 -			
Hydr. Flow Requirement	15-40 GPM @ 3,000 PSI	25-40 GPM @ 3,000 PSI		
Cutter Shaft Rotation Speed	1,300-1,500 RPM			

SKU: ET-CY-XX





The Sidewinder flail brush mower is built for your Mini Skid Steer as well as custom boom applications. The open-face and deep cutting design combine to tackle the toughest material that a Mini Skid Steer can face. Our customers have said: "mini skid steers aren't powerful enough for a mulcher attachment, so this is by far the next best thing!".

Grade 50 structural steel frame housing

Precision balanced drive system and

1 LB free hanging blades

Roller provides an even cut and smooth operation

#### **MINI SS PLATES**

Mini Universal, Bobcat MT, ASV/TEREX PT-RC-30, New Holland (Fit is not guaranteed, please contact us first)



Add any mini skid steer plate or use out tube mount system for boom mount applications

#### **BACK VIEW**

#### **SIDE VIEW**



MODEL	SIDEWINDER FLAIL MOWE	R
Weight	392 LBS	
Width	50"	
Depth	25.5"	
Cutter Width	36"	
Height	20"	
Cutter Blades	20	AN AN AND AN AND AN
Cutter Blade Weight	1 LBS	
Cutter Retention	3/4" Grade 8, Castle Nut Locke	ed
Bearings	Self Aligning Spherical	
Flow Rate	5 - 22 GPM	

SKU: ET-SW-XX



2020





### FLAIL MOWER

The perfect combination of size and strength. Built to handle extreme brush clearing while reducing swing weight. Precision laser-balanced cutter shafts provide fully harnessed power, and reliable + long-term results. Our EX Series of Flail mowers are an ideal tool for clearing large areas of brush, grass and even trees up to 4".

S E R I E S – EX-30M, EX-30 EX-40, EX-50

Per an

Incredibly strong housing (designed to have equal integrity of competing mowers, but lighter weight to reduce tipping)

Permco Gear Drive Motor and precision balanced drive system

2 lbs Y-Knife blades

MODELS

EX-30M 425 lbs EX-30 440 lbs EX-40 600 lbs EX -50 950 lbs

ET-EX-30

TITLE OF THE PARTY OF THE PARTY



ET-EX-30M

ET-EX-40

ET-EX-50

USE WITH



"Durable, dependable, valued piece of equipment – nice addition to our brush clearing business."

- West E.

<b>Features</b> (Model: EX-30)		Design Specs	
Cut width	30″	Housing material	A572 Grade 50
Overall width	43"	Housing thickness	3/16" ends, 1/8" housing
Mechanical depth	34"	Mounting Pattern	Square pad for excavator
Deck height	25.25"	Motor	Permco
Minimum cut height	2"	Drive shaft material	Steel 4140 HT
Maximum cut height with roller	n/a	Drive shaft size	1.5" Non-Drive end, 1.57" Drive end
Cutting capacity	4"	Cutter style	Y Knife blades, 2lbs
Recomennded material	Brush	Cutter blade material	Case hardened spring steel
Max pressure	3500 PSI	Blade bolt size	1" - 12x3.25" Grade 8
-	-	Blade life expectancy	500 hrs, no rocks

SKU: ET-EX-XX



💃 REQUEST A QUOTE



### WE'RE A SMALL COMPANY THAT DOES **BIG** THINGS

### A PROUD SPONSOR OF 2018 SUPERCROSS

ETTERA-USA.COM

RACETRACK.TV

skidsteersolutions.com





# 3-POINT ADAPTOR


This 3-Point Adapter will provided you with the ability to pick up almost any tractor attachment and use it on your Skid Steer Loader. Now that's handy!


FRONT VIEW

Easily adjust to all attachment points to make any machine mount easy.

CAT 1 or CAT 2 Options



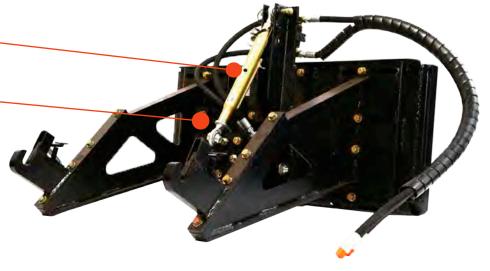





Non Motorized 3 Point adaptor

### **MOTOR SIZES:**

10-17 GPM - 21 HP 17-22 GPM - 27 HP 21-25 GPM - 31 HP



MODEL	3 POINT ADAPTER	
Weight (LBS)	425	
Category 1 Arms	7/8" Hitch Pins	
Category 2 Arms	1 1/8" Hitch Pins	
Lift Arms	Adjustable Cat 0 - 2	
Back Plate	Heavy Duty Double 1/4" Steel	
Flow Rating	32-40 GPM	
Hydraulic Pressure	4,000 PSI	
Motor	55 HP Motor with Integrate 1 3/8" PTO Shaft	
Shaft Speed Rotation	540 RPM	

SKU: ET-3PT-01





## TYPHOON

Clear land faster thanks to the rugged construction and raw power of the Typhoon. Two 12 lb dual edged blades provide the edge, while the motor and frame take care of the rest.

SERIES - T60, T74

3"x4" high strength structural steel tube

Open front makes tree clearing fast & easy

12 lb forged dual-edged blades





#### MODELS

T60 T*7*4 Ask about Piston Motor Upgrades



MODEL	<i>60</i> "	<b>74</b> "	
Weight	1300 LBS	1800 LBS	
Overall Width	63.5"	79.5"	
Overall Depth	67"	83.25"	
Cutter Width	60"	74"	
Height	27"	25.5"	
Hydraulic Gear Motor Options	18-40 GPM		
High Flow Hyd. Piston Motor	32-40 GPM		
Drive Spindle	Precision CNC Machine 4140 Heat Treated		
Blade Holder	1" - T1 Flame Cut Blade Holder		
Capacity	8"+ Thick Material	12"+ Thick Material	

SKU: ET-TXX-100







## POST DRIVER

Drive more posts faster. The PDX's Breaker Style design ensures maximum power and efficiency. Multiple driver head options and functionality peak offer versatility, and a breaker spike allows for holes to be pre-driven. T-Posts, Round Posts, Square Posts and in the right conditions, rail-way ties; these are the jobs for a PDX.

Add a coupler for an excavator OR backhoe

5-FOOT Breaker Spike

15 degrees of tilt



Modular mounting and accessory system, add any option at anytime.

Excavator Coupler



PDX-750

750 FT LBS

PDX-1000

1000 FT LBS



MODEL	PDX-750	PDX-1000	
Width	45-14"	45-4"	
Coned Driver Head Diameter	9"	9"	
CDH Max Post Diameter	8"	8"	
Flat Driver Head Max. Post Diameter	8"	9"	
Flat Driver Head Eyelet Sizes	2.5, 4.5, 6.5, 8.5 (IN.)	2.5, 4.5, 6.5, 8.5 (IN.)	
Driver Head Material	4140 Heat Treated American-Made	Steel	
Tilt Functionality	15º Side-to-Side	15º Side-to-Side	
Hyd. Flow Range	13 - 21 GPM	13 - 21 GPM	
Pressure Range	1400 - 1700	1400 - 1700	
Weight	747 - 1068 LBS	992 - 1425 LBS	

SKU: ET-PDX-XXXX



2020





# AUGER

Add versatility to your earth drilling operation with an Eterra Auger. These earth drilling attachments are built to fit the needs of any compact machine, and have many added features.

SERIES - ML2500, 2500





The ML-2500 mini universal auger is compatible with most

ET-33-9014 **Tungsten Tooth** 






Key accessories

















MUUEL	MAX BII	GPM
ML2500	24"	7-17
2500	24"	7-17
3500	36"	17-23
4500	48"	23-30
	·	·





MODEL	<i>ML2500</i>	<b>2500</b>	<i>3500</i>	<i>4500</i>
Hydraulic Flow Range	6 - 17 GPM	6 - 17 GPM	17-23 GPM	23-30 GPM
Weight	230 LBS	90 LBS	110 LBS	120 LBS
Max Flow Speed	87 RPM	87 RPM	100 RPM	97 RPM
Torque at 3,5000 PSI/Max Torque	2,100 ft. lbs	2,100 ft. lbs	2,666 ft. lbs	3,319 ft. lbs
Minimum Hydraulic Flow	7 GPM	7 GPM	17 GPM	23 GPM
Maximum Hydraulic Flow	17 GPM	17 GPM	23 GPM	30 GPM
Max RPM	-	86	86	86
Output Shaft	-	2"	2"	2"
Max Pressure	-	3000 PSI	3000 PSI	3000 PSI
Recommended Auger Sizes	4 - 24"	4 - 24" Diameter	4 - 36" Diameter	4 - 48" Diameter

SKU: ET-XXXX-10







#### LOOKING FOR A PRICE?

WWW.ETERRA-USA.COM
@ETERRA-USA • 360.203.7730

### REQUEST A QUOTE TODAY

For nearly a decade, we've operated as a family-owned company engineering, manufacturing and selling world-class attachments. We take pride in our work, and we don't cut corners whether we're designing a new mower or working with a customer to help them find the right auger. Innovative products, superior customer service, and a company you can trust.






# MIKIGO

Scoop up material, mix it on the move or while parked and then dispense using any of the three different methods. Versatility on the jobsite is paramount and that's why the Mix N Go is packed with features like a side chute, center chute, bag cutter and more.


SERIES - 100, 250 450,600

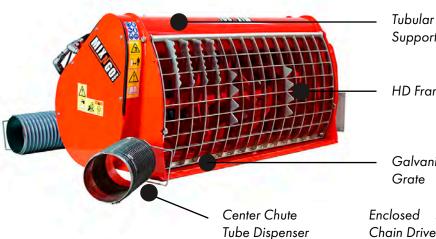

Tubular Support HD Frame Galvanized Grate

3.34 CU. FT 100 250 9 CU. FT 450 16 CU. FT 600 21 CU. FT



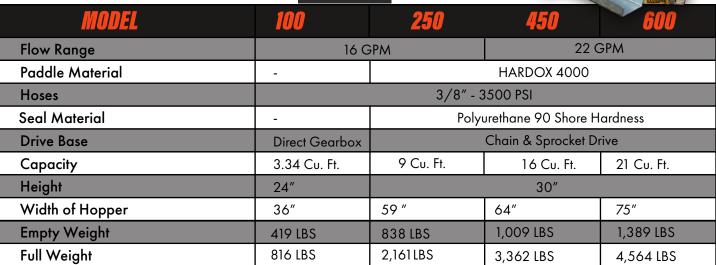

SKU: ET-BMX-XXX








## BEACH MASTER

A light material screener that brings speed and efficiency to any clearing operation. Screen out the smallest debris and leave a clean surface behind at a horse arena or a beach resort.



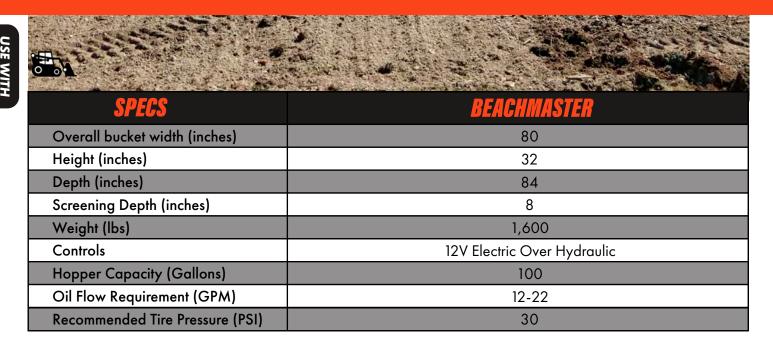

SKU: ET-BM-01





### BOX GRADER

The innovative design allows for aggressive digging and leveling while ensuring constant ground contact no matter the terrain. The Box Grader is your economical solution to grading roads, paths, fields, motocross tracks and more. Say bye-bye to pot holes!

SERIES – EG-72, EG-84







"Nicely weighted to successfully cut, gather and redistribute material in a very clean fashion."




- RJ

MODEL	EG-72	EG-84	
Cutting Width	72"	84"	
Total Width	77"	89 1/4"	
Depth	48" (56" with mount)	48" (56" with mount)	
Box Height	20" with blades	20" with blades	
Weight	1,038 LBS	1,080 LBS	
Tubing	H beam construction using 3" x 4.5" x 3/8" Wall Structural Tubing		
Wear Surface	5/8" x 2" AR400	5/8" x 2" AR400	
Blade Material	High-carbon Manganese Steel Alloy, RC 29		
Blade Size	5/8" Thick x 6" Tall x 72" Wide	5/8" Thick x 6" Tall x 84" Wide	
Finish	Black Hammered Finish Powder Coat		

SKU: ET-EG-XX





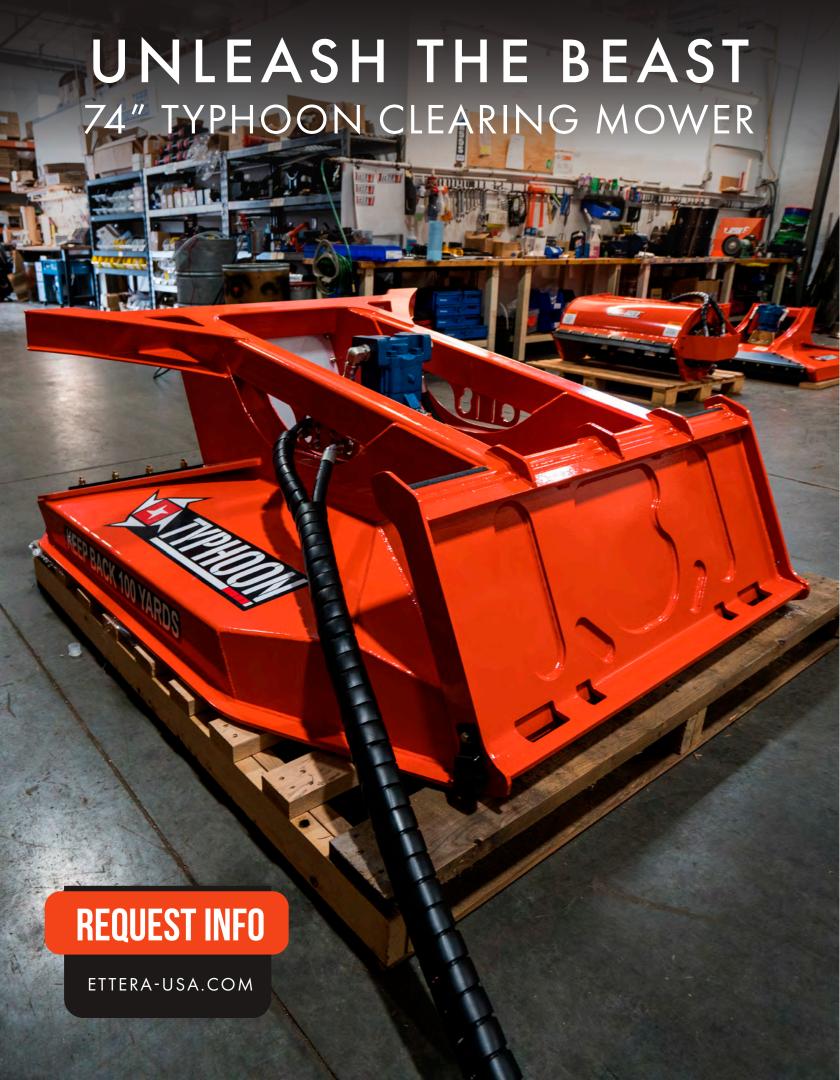

SERIES - MT-48

The Eterra Trencher comes standard with a 70/30 chain – 70% aggressive tungsten carbide cutter teeth. This combination is the





### UNCOMPROMISED

The 48" trencher uses a 70/30 chain for uncompromised trench digging



MODEL	MT-48	
Trencher Length (inches)	48	
Weight (LBS)	700	
Flow Rating (GPM)	14-23	
Auger Discharge (inches)	18	
Chain Width (inches)	6	
Chain Specs	Shark 70/30 [70% tungsten carbide/30% dirt teeth]	
	Manual	

SKU: ET-MT-XX







# BACKHOE

A full line of Backhoes that are tough, durable and effective. Swap out buckets and tools fast thanks to the revolutionary ECS Quick Exchange system.

S E R I E S : E40, E60 E70, E70H, E70HX



### 8"- 32" ECS Buckets ECS Thumb

Attach with your mss or skid steer, with 8 - 32" bucket types & other backhoe attachments from Eterra







MODEL	<b>E40</b>	<i>E60</i>	<i>E70</i>	
Overall Reach	52"	77"	84"	
Width	24.75"	45.5"	-	
Length	55"	80″	-	
Height	29"	29"	-	
Min Hydraulic Specs	10 GPM @ 900 PSI			
Boom Shaft Size	4" × 4"			
Digging Depth	48"	72"	84"	
Lift Capacity	1,000 LBS			
Min - Max Bucket Size	8 - 16"	8 - 32"		
Weight	222 LBS	475 LBS	- 560 LBS	


SKU: ET-EXX-BM










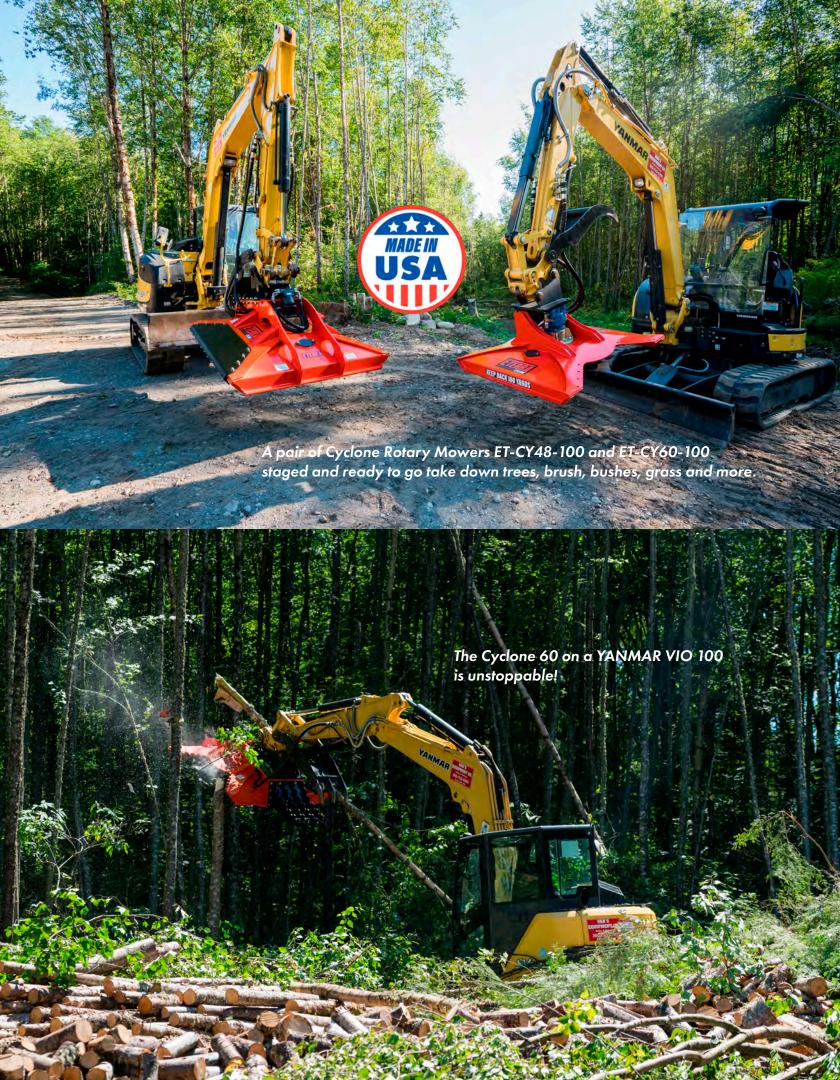

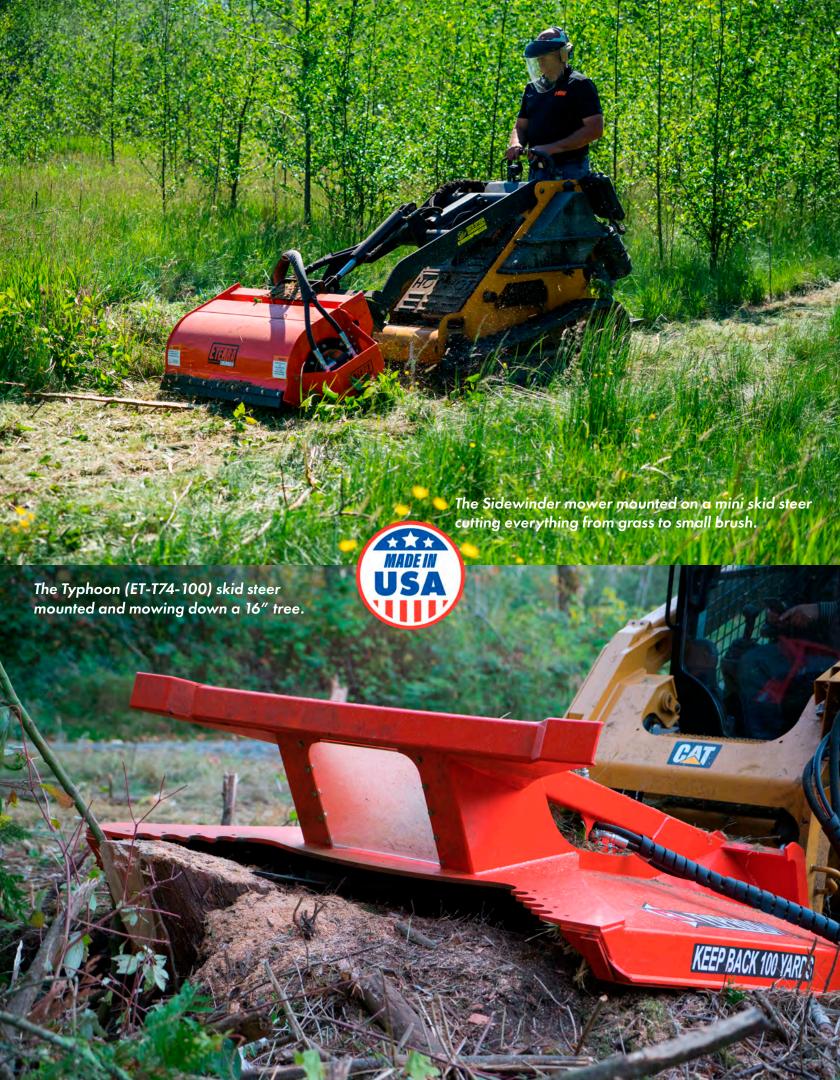





#### **NOTES**

We don't just make great attachments, we use them too. We're family-owned and operated and just like that, we build attachments we own and operate. The quick story is we are based in Washington State where most of our products are manufactured or assembled.

#### Rest assured that our attachments are built by operators, for operators.

This catalog is designed to get you up to date on our latest products going into 2020. We want to make sure that you have the right tools for your upcoming projects. For all quotes, pricing and general inquiries, please contact our sales line or your preferred local dealer.



360.203.7730



SALES@ETERRAATTACHMENTS.COM





WWW.ETERRA-USA.COM • @ETERRA\_USA
360.203.7730 • SALES@ETERRAATTACHMENTS.COM