




FLAIL MOWER

The perfect combination of size and strength. Built to handle extreme brush clearing while reducing swing weight. Precision laser-balanced cutter shafts provide fully harnessed power.

SERIES : EX-30M, EX-30 EX-40, EX-50

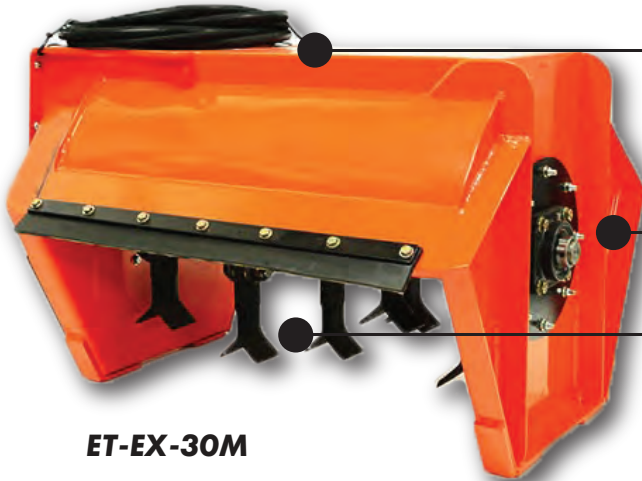

ET-EX-30M

Incredibly strong housing
(designed to have equal integrity
of competing mowers, but lighter
weight to reduce tipping)

Permco Gear Drive Motor

2 lbs Y-Knife blades

MODELS

EX-30M	425 lbs
EX-30	440 lbs
EX-40	600 lbs
EX-50	950 lbs



ET-EX-30



ET-EX-40



ET-EX-50

USE WITH



Check out the Eterra Sidewinder
for a 36" flail mower (use with
excavators and mini ss)

Features (Model: EX-30)		Design Specs	
Cut width	30"	Housing material	A572 Grade 50
Overall width	43"	Housing thickness	3/16" ends, 1/8" housing
Mechanical depth	34"	Main driving bearing size	80 mm OD Axis 40° angular contact
Deck height	25.25"	Shaft bearing size	Turner UCF208-24 Self Aligning
Minimum cut height	2"	Drive shaft material	Steel 4140 HT
Maximum cut height with roller	n/a	Drive shaft size	1.5" Non-Drive end, 1.57" Drive end
Cutting capacity	6"+	Cutter style	Y Knife blades, 2lbs
Recommended material	Brush	Cutter blade material	Case hardened spring steel
Max pressure	3500 PSI	Blade bolt size	1" - 12x3.25" Grade 8
-	-	Blade life expectancy	500 hrs, no rocks

